

WRENCHES & PIPE VICES

Leader Pattern Pipe Wrenches




The frame and handle are made from a one piece ductile iron casting which is guaranteed unbreakable, whilst the flash hardened teeth increase wear resistance. The hardened and tempered steel adjustment nut gives a longer working life and the precision machined screw thread and spring jaw remain open until pressure is applied. Can also be used as a crude hammer. Conforms to British Standard BS3594.



| Part No | Length (when open) | Pipe Capacity | Box Qty |
|---------|--------------------|---------------|---------|
| ELPW8 | 8" (200mm) | 1" (25mm) | 4 |
| ELPW10 | 10" (250mm) | 1½" (38mm) | 4 |
| ELPW12 | 12" (300mm) | 2" (51mm) | 4 |
| ELPW14 | 14" (350mm) | 2" (51mm) | 4 |
| ELPW18 | 18" (450mm) | 2½" (63mm) | 4 |
| ELPW24 | 24" (600mm) | 3" (76mm) | 1 |
| ELPW36 | 36" (910mm) | 5" (127mm) | 1 |
| ELPW48 | 48" (1200mm) | 6" (152mm) | 1 |

Stillson Pattern Pipe Wrenches

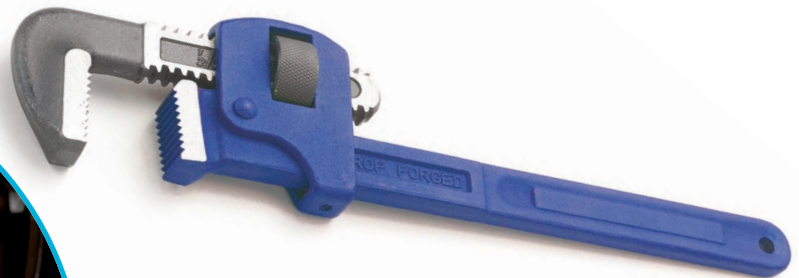

The hardened and tempered hook jaw eliminates breakage, whilst the flash hardened teeth increase wear resistance. The nut abutment means that all loading is transferred direct from the handle to the nut and jaw via the nut abutment, ensuring that the frame is not load bearing, thus reducing the possibility of frame failure. Conforms to British Standard BS3594

| Part No | Length (when open) | Pipe Capacity | Box Qty |
|---------|--------------------|---------------|---------|
| ESPW8 | 8" (200mm) | ¾" (19mm) | 6 |
| ESPW10 | 10" (250mm) | 1" (25mm) | 6 |
| ESPW12 | 12" (300mm) | 1½" (32mm) | 6 |
| ESPW14 | 14" (350mm) | 1½" (38mm) | 6 |
| ESPW18 | 18" (450mm) | 2" (51mm) | 4 |
| ESPW24 | 24" (600mm) | 2½" (63mm) | 1 |
| ESPW36 | 36" (910mm) | 3½" (89mm) | 1 |