

**IP67**  
WATERPROOF


**ABSOLUTE**  
LEVEL

**BACKLIGHT**


**BUZZER ALARM**  
AT 0° AND 90°

**WORKING TEMPERATURE**  
-5°C ~ 50°C

## DIGITAL LEVEL AND SLOPE METER



2175-360

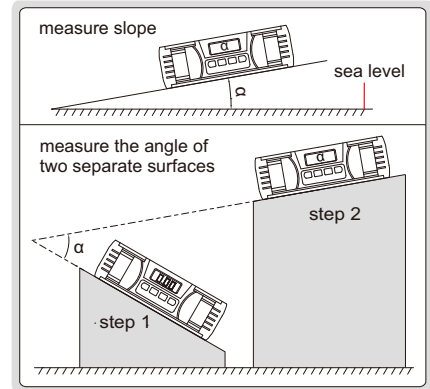

- IP67 dust/waterproof
- Used as level and slope meter
- Aluminum frame, shock absorbing rubber end caps
- Magnetic bottom with V-groove for shafts
- The sea level is permanently set inside the chip, zero setting is not needed when batteries are replaced
- Buttons: ON/OFF, backlight/buzzer alarm, absolute and incremental measurement, unit (mm/m, %, °), HOLD (keep the reading)
- Three AAA batteries, automatic power off

Code	Range	Resolution	Accuracy
2175-360	0-360° (90°x4)	0.05° (=0.873mm/m)	at 0°: ±0.05°; at others: ±0.1°

**IP54**  
WATERPROOF


**ABSOLUTE**  
LEVEL

**BACKLIGHT**


**BUZZER ALARM**  
AT 0° AND 90°

**WORKING TEMPERATURE**  
-5°C ~ 50°C

## DIGITAL LEVEL AND SLOPE METER



2179-360

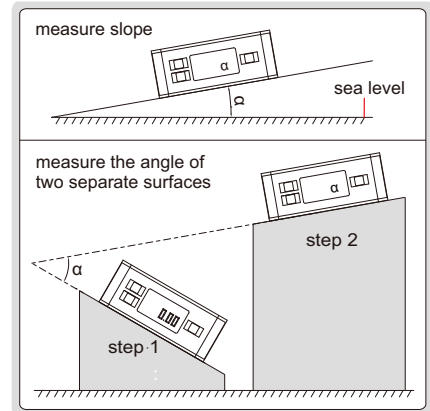

- IP54 dust/waterproof
- Used as level and slope meter
- Aluminum frame
- Magnetic bottom with V-groove for shafts
- The sea level is permanently set inside the chip, zero setting is not needed when battery is replaced
- Buttons: ON/OFF, absolute and incremental measurement, keep the reading, buzzer alarm, unit (mm/m, %, in/ft), conversion, backlight
- Two AAA batteries, automatic power off

Code	Range	Resolution	Accuracy
2179-360	0-360° (90°x4)	0.05° (=0.873mm/m)	at 0° and 90°: ±0.1°; at others: ±0.2°

**DISPLAY FLIPS OVER WHEN**  
**THE BOTTOM FACES UP**


**WORKING TEMPERATURE**  
-5°C ~ 50°C

**BACKLIGHT**


## DIGITAL LEVEL AND SLOPE METER

**ABSOLUTE**  
LEVEL

**MAGNETIC**  
BOTTOM



2170-1

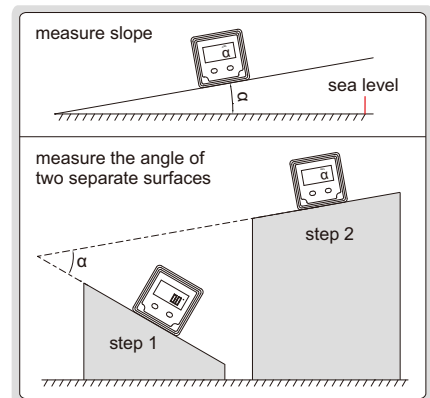

- Used as level and slope meter
- Aluminum frame
- Magnetic bottom
- The display flips over when the bottom faces up
- The backlight is on automatically when in use, and automatically off in 15 seconds after use
- The sea level is permanently set inside the chip, zero setting is not needed when battery is replaced
- Buttons: ON/OFF, ZERO, absolute and incremental measurement
- One AAA battery, automatic power off in 5 minutes

Code	Range	Resolution	Accuracy
2170-1	4x90°	0.1° (=1.745mm/m)	at 0° and 90°: ±0.1°; at others: ±0.2°